


UNILUX HOT WATER BOILER CAPACITIES:

BOILER MODEL W	MAXIMUM FUEL INPUT BTU/HR IN THOUSANDS	BOILER OUTPUT BTU/HR IN THOUSANDS	APPROX. BOILER HORSE POWER	SHIPPING WEIGHT LBS	OPERATING WEIGHT LBS	WATER CONTENT U.S. GALLONS
100	1250	1062	31.5	3290	3790	60
150	1750	1488	44.5	3800	4380	70
200	2200	1870	56	4400	5035	76
250	2750	2338	70	5000	5750	90
300	3000	2550	76	5600	6410	97
350	3750	3188	95.2	6100	6985	106
400	4300	3655	109	6800	7800	120
500	5400	4590	137	8200	9660	175
600	6250	5313	159	9000	10625	195
700	7235	6150	184	10000	11820	218
800	8270	7030	210	11400	13650	270
900	9300	7905	236	12140	14580	293
1000	10330	8780	262	13200	15870	320
1200	12400	10540	315	15480	18625	377
1400	14470	12300	367	16600	20100	420
1600	16530	14050	420	18800	22680	465
1800	18600	15810	472	20960	25210	510
2000	20670	17570	525	22700	27290	550
2500	25000	21250	635	28500	35000	776
2900	29000	24650	736	30800	38000	865
3000	34000	28900	863	43160	53880	1285
3500	38000	32300	965	49000	61340	1480

ORDER NUMBER PROCEDURE: Example – ZF 300WG

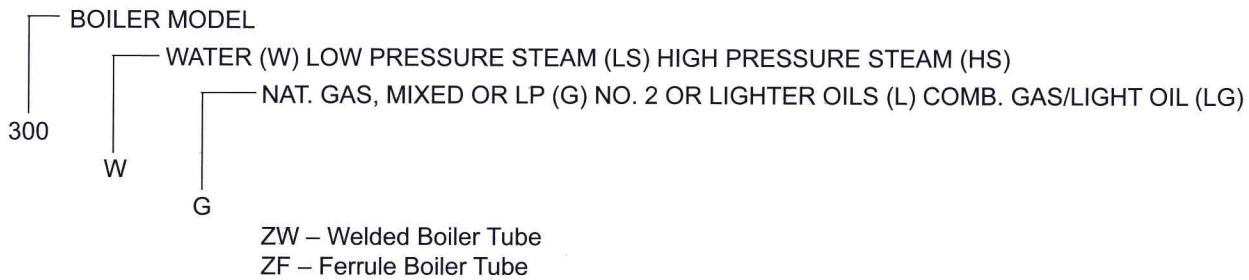

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS MUST BE CONFIRMED FOR CONSTRUCTION.

STANDARD EQUIPMENT:

- PRESSURE GAUGE • THERMOMETER
- LWCO • RELIEF VALVES • BURNER OPERATING AND SAFETY TEMPERATURE CONTROLS

UNILUX REPRESENTATIVE:

CONTACT
P.C. McKENZIE COMPANY

1365 McLaughlin Run Road
P.O. Box 112638
Pittsburgh, Pennsylvania 15241
Telephone: (412) 257-8866
Fax: (412) 257-8890

www.mckenziecorp.com

E-Mail: mckenzie@mckenziecorp.com

ALL BURNER EQUIPMENT UL, CSA APPROVED

